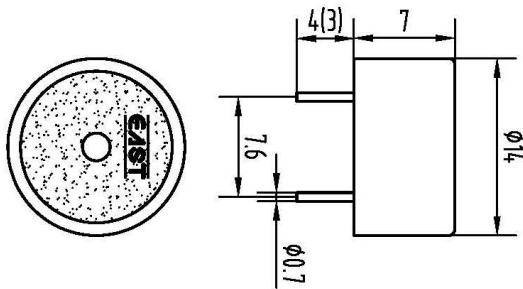
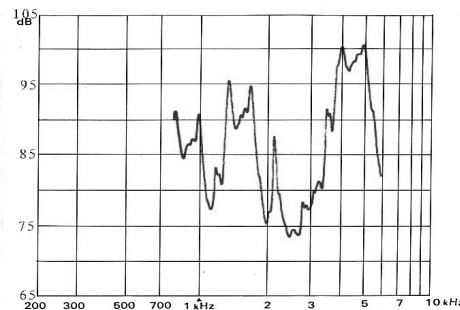


**External-driven Piezo Transducer****EFM-250DN****DIMENSIONS: (Unit: mm)****FEATURES:**

- Compact Structure
- Sealed for Wave Soldering and Washing

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

CHARACTERISTICS:**ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

4.1kHz/9V_{p-p} Square Wave/10cm.....80dB(A)

Capacitance at 120Hz.....10nF±30%

Allowable Input Voltage.....20V_{p-p}

Max. Consumption

at 4.1kHz/9V_{p-p} Square Wave2mA

Oscillating Frequency.....4.1±0.5kHz

Operating Temperature.....-20~+85°C

Case Material/Color.....PC/Black

Weight.....1g

PACKING INFORMATION:

Packing: 5000 pcs per export carton

Carton Size: 47×30.5×33cm

G. Weight: 6.5 kgs N. Weight: 5 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768



| REVISION HISTORY | | | | |
|------------------|--|-------------------------------|--------------|---------------|
| REV | DESCRIPTION | ISSUED BY/DATE | CHECKED | APPROVED |
| 3 | RELEASE | WEN GUANGJUN May 14, 2008 | ZHANGCHUNLEI | WANGJIANCHENG |
| 4 | Operating temp. from 70°C to 85°C Add "EAST" marking | WEN GUANGJUN June 15, 2009 | ZHANGCHUNLEI | WANGJIANCHENG |
| | | | | |
| | | | | |
| | | | | |