




External-driven Piezo Transducer

TFM-11

Rev.2



DIMENSIONS: (Unit: mm)

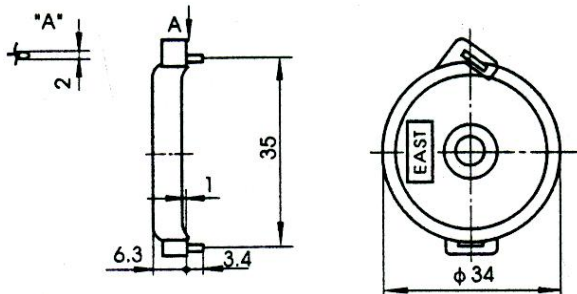


FEATURES:

- Low Frequency
- Low Current Drain
- Light and Compact

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

CHARACTERISTICS:

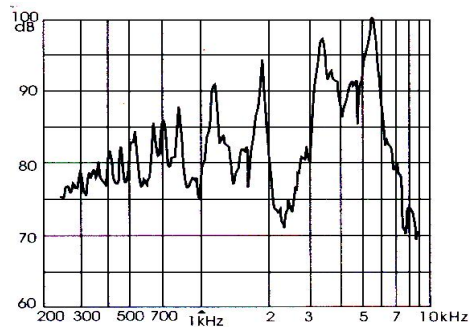

ELECTRICAL SPECIFICATIONS:

- Min. Sound Pressure Level at
1.0kHz/12V_{p-p} Square Wave/30cm.....75dB(A)
- Capacitance at 120Hz.....45nF±30%
- Allowable Input Voltage.....40V_{p-p}
- Max. Consumption
at 1.0kHz/12V_{p-p} Square Wave.....8mA
- Resonant Frequency..... 1.0±0.5kHz
- Operating Temperature..... -20~+70°C
- Case Material/Color.....ABS/Black
- Weight..... 3.5g

PACKING INFORMATION:

- Packing: 1000 pcs per export carton
- Carton Size: 47×30.5×35 cm
- G. Weight: 5.0 kgs N. Weight: 3.5 kgs
- Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany
- Tel: +49-6442-9220950, Fax: +49-3212-1258768

