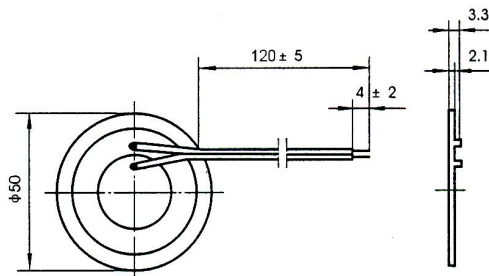


**External-driven Piezo Transducer**


Rev.2

**TFM-15A****DIMENSIONS: (Unit: mm)****FEATURES:**

- Low Frequency
- Low Current Drain
- Light and Compact

**APPLICATIONS:**

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

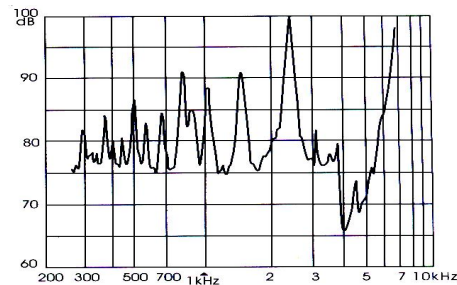**CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

750Hz/12V<sub>p-p</sub> Square Wave/10cm.....75dB(A)

Capacitance at 120Hz.....66nF±30%

Allowable Input Voltage.....40V<sub>p-p</sub>

Max. Consumption

at 750Hz/12V<sub>p-p</sub> Square Wave.....6mA

Resonant Frequency.....750±250Hz

Operating Temperature.....-20~+70°C

Case Material/Color.....ABS/White

Weight.....4g

Wire Standard.....UL1095-28AWG

**PACKING INFORMATION:**

Packing: 2160 pcs per export carton

Carton Size: 47×30.5×19 cm

G. Weight: 10.1 kgs N. Weight: 8.6 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

