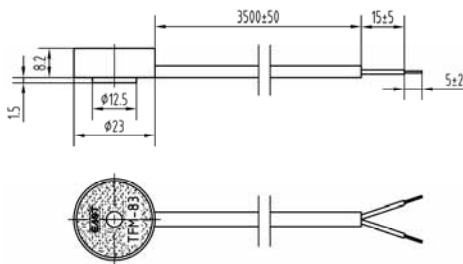
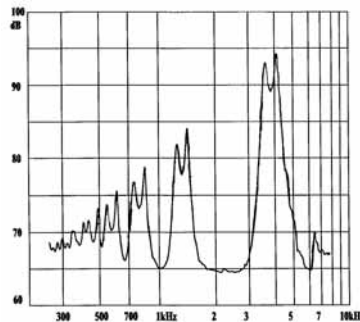


**External-driven Piezo Transducer****TFM-83L3520****FEATURES:**

- Small Size
- Low Current Drain
- Light and Compact

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)**CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS :**

Min. Sound Pressure Level at

4.0kHz/3V_{p-p} Square Wave/10cm.....80dB(A)1.33kHz/3V_{p-p} Square Wave/10cm.....70dB(A)

Capacitance at 1000Hz.....13nF±30%

Allowable Input Voltage.....40V_{p-p}

Max. Consumption at

4.0kHz/3V_{p-p} Square Wave.....3.5mA

Resonant Frequency.....4.0±0.5kHz

Operating Temperature.....-20~+70°C

Case Material/Color.....PC/Black

Weight.....70g

Wire Standard.....2C× 24AWG (UL1095)

PACKING INFORMATION:

Packing: 160 pcs per export carton

Carton Size: 47x30.5x25 cm

G. Weight: 12.7 kgs N. Weight: 11.2 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

