

High-Output Piezo Alarm Transducer

RoHS
Compliant

W-42



FEATURES:


- High Output and High Impedance
- A Glass Reinforced Nylon Housing

Rev.2

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)

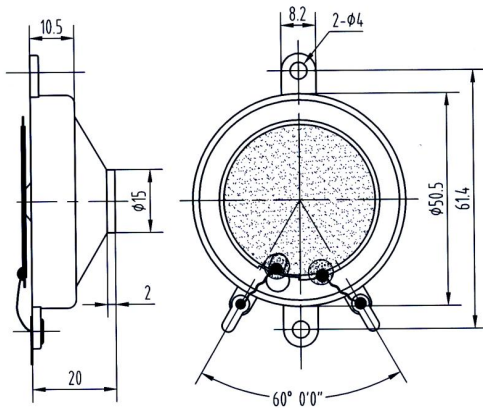

ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at

2.5~3.5kHz /60V_{P-P} Square Wave /100cm.....115dB(A)

Capacitance at 100Hz.....140 nF $\pm$ 30%

Allowable Input Voltage.....60V_{P-P}

Resonant Frequency.....3 $\pm$ 0.5kHz

Operating Temperature.....-20~+70°C

Storage Temperature.....-40~+85°C

Case Material/Color.....PA6/Black

Weight.....11.7g

PACKING INFORMATION:

Packing: 360 pcs per export carton

Carton Size: 47x30.5x29cm

G. Weight: 6.0 kgs N. Weight: 4.2 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

