



Magnetic Buzzer

EMX- 11T03SP



Rev.2




FEATURES:

- Low Frequency
- Low Voltage
- Small and Slim Size


APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)

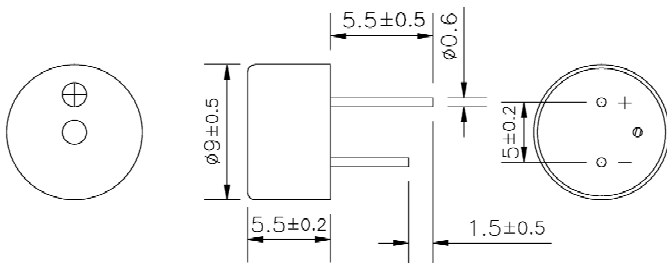

CHARACTERISTICS:

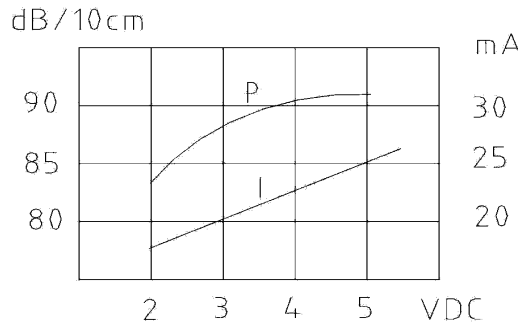

(Optional wash tab)

ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at	
3V _{DC} /10cm.....	80dB(A)
Rated Voltage.....	3V _{DC}
Operating Voltage.....	2.5~4.0V _{DC}
Max. Consumption.....	40mA/3V _{DC}
Resonant Frequency.....	2.7±0.4kHz
Tone Nature.....	Continuous
Operating Temperature.....	-20~+70°C
Storage Temperature.....	-30~+80°C
Weight.....	1.0g

PACKING INFORMATION:

Packing: 3000pcs per export carton
 Carton Size: 47x25x28 cm
 G. Weight: 4.5 kgs N. Weight: 3.0 kgs
 Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany
 Tel: +49-6442-9220950, Fax: +49-3212-1258768



REVISION HISTORY				
REV	DESCRIPTION	ISSUED BY/DATE	CHECKED	APPROVED
1	RELEASE	JINYOU LIANG May 21, 2008	ZHANGCHUNLEI	WANGJIANCHENG
2	Add to tolerance dimension	ZHOUHONGGANG JUN 02, 2009	ZHANGCHUNLEI	WANGJIANCHENG