



### Magnetic Buzzer



## EMX-300L<sub>1</sub>(L<sub>2</sub>)SERIES



#### FEATURES:

- Low Current
- Compact
- Rich Sound


#### APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments


EMX-300L<sub>1</sub>SERIES

EMX-300L<sub>2</sub>SERIES

#### DIMENSIONS:(Unit: mm)

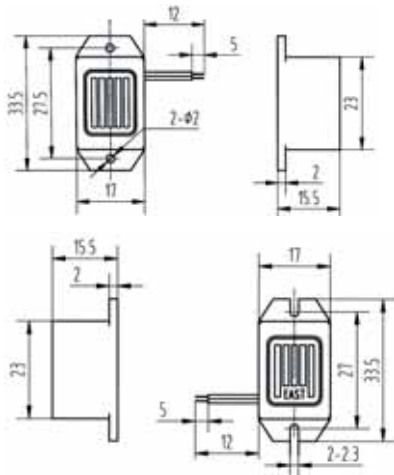

#### CHARACTERISTICS: EMX-312L

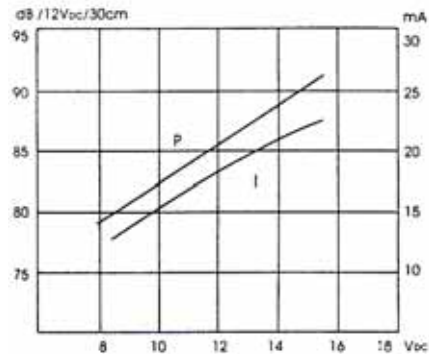

#### ELECTRICAL SPECIFICATIONS:

Model No.	EMX-301L	MX-303L	MX-306L	EMX-309L	EMX-312L	MX-324L
Min. Sound Pressure Level (dB)	70		75			
	/Rated Voltage/30cm		/Rated Voltage/30cm			
Rated Voltage (V <sub>DC</sub> )	1.5	3.6	9	12	24	
Operating Voltage (V <sub>DC</sub> )	1~3	2~4	4~8	6~2	9~15	15~7
Max. Consumption (mA)	20		25	28	30	
Oscillating Frequency (Hz)	400±50					
Operating Temperature (°C)	-20~ +70					
Weight (g)	8					

#### PACKING INFORMATION:

Packing: 2000 pcs per export carton  
 Carton Size: 47×30.5×35 cm  
 G. Weight: 17.5 kgs N. Weight: 16 kgs  
 Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany  
 Tel: +49-6442-9220950, Fax: +49-3212-1258768

