



Magnetic Buzzer



EMX-4B00P SERIES


Rev.2

FEATURES:



- Low Current Consumption
- Trigger Control Terminal
- Pin Terminals for Direct Mounting On P.C Board



DIMENSIONS: (Unit: mm)

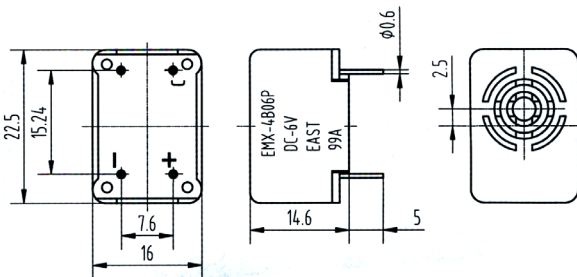

CHARACTERISTICS:

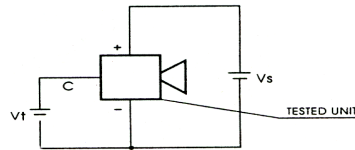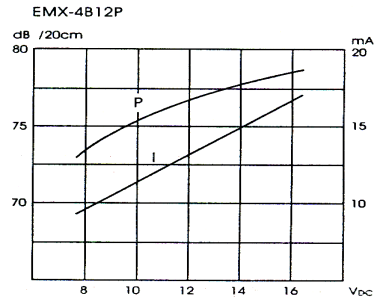

ELECTRICAL SPECIFICATIONS:

Model No.	EMX-4B06P	EMX-4B12P	EMX-4B24P
Min. Sound Pressure Level (dB)	70/Rated Voltage/20cm		
Rated Voltage (V _{DC})	6	12	24
Operating Voltage (V _{DC})	3~ 8	8~ 16	18~ 30
Trigger Voltage (V _{DC})	≥ 3	≥5	≥18
Max. Consumption (mA)	23/6V _{DC}	20/12V _{DC}	20/24V _{DC}
Resonant Frequency (Hz)	400±100		
Operating Temperature (°C)	-40~ +85		
Weight (g)	10		

PACKING INFORMATION:

Packing: 1400 pcs per export carton

Carton Size: 47×30.5×35 cm

G. Weight: 15.5 kgs N. Weight: 14kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

