

**Magnetic Transducer**RoHS  
Compliant**EMX-8T12SP**

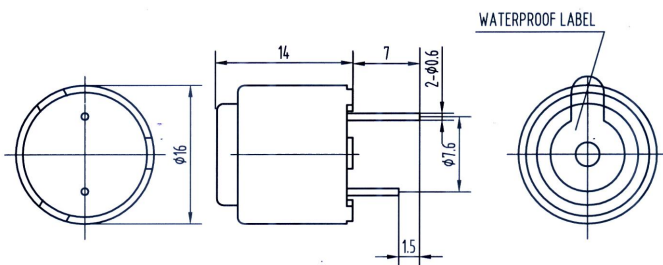
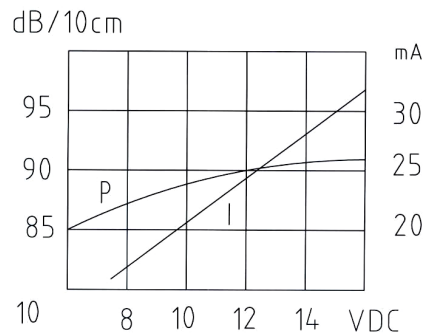
Rev.2

**FEATURES:**

- Low Frequency
- Low Voltage
- Small and Slim Size

**APPLICATIONS:**

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

**DIMENSIONS: (Unit: mm)****CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

12V<sub>DC</sub>/10cm.....85dB(A)Rated Voltage.....12V<sub>DC</sub>Operating Voltage.....8~15V<sub>DC</sub>Max. Consumption.....30mA/12V<sub>DC</sub>

Oscillating Frequency.....2300±300Hz

Operating Temperature.....-20~+70 °C

Storage Temperature.....-30~+80 °C

Weight.....5g

Housing Material... ..NORYL

**PACKING INFORMATION:**

Packing: 900 pcs per export carton

Carton Size: 47 × 25 × 23cm

G. Weight: 6.0 kgs N. Weight: 4.5 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

