

Magnetic Transducer

EMX- 06PB

RoHS
Compliant

Rev.2


FEATURES:

- Low Frequency
- Small Size and Compact
- Rich Sound


APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)

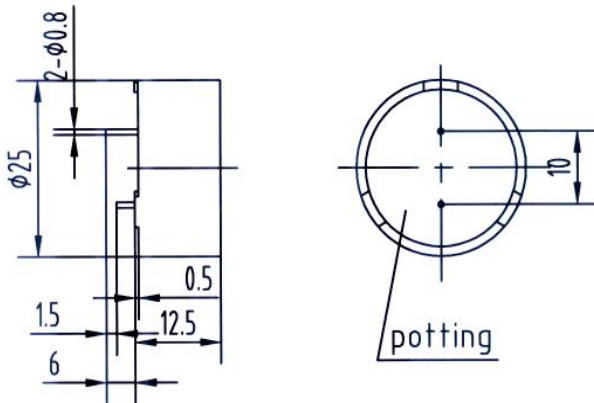

CHARACTERISTICS:

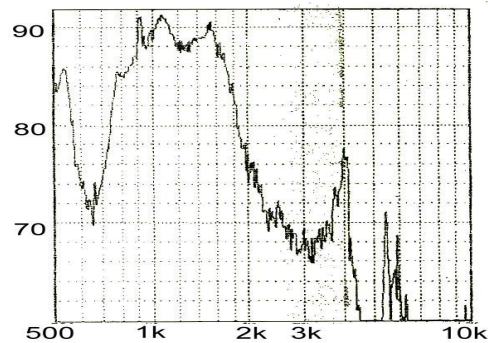


ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at	
5V/1000Hz/10cm	85dB(A)
Rated Voltage	5V
Operating Voltage	3~7V
Max. Consumption at	
1000Hz/10Vp-p Square Wave	80mA/5V _{DC}
Resonant Frequency	1000Hz
Coil Resistance	27 $\pm 4\Omega$
Operating Temperature	-20~+70°C
Storage Temperature	-40~+85°C
Housing Material	NORYL
Weight	10g

Note: Value applying rated voltage: 1/2 duty square wave

TEST CIRCUITS:

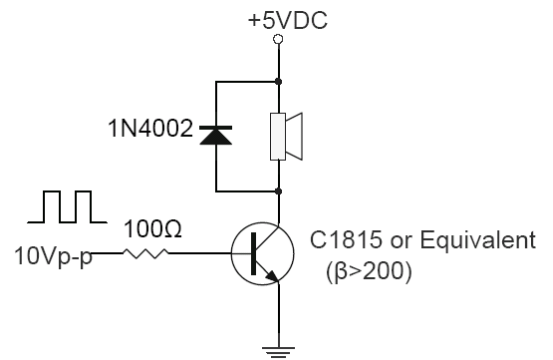

PACKING INFORMATION:

Packing: 500 pcs per export carton

Carton Size: 39.5 × 20 × 21.5cm

G. Weight: 6.5 kgs N. Weight: 5 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

