



### Piezo Buzzer

RoHS  
Compliant

## EFM-620L

Rev.2




#### FEATURES:

- High Output
- High Efficiency and Reliability
- Lead Wire


#### APPLICATIONS:

- Alarm Devices, Such as CO Detector, Gas Detector, Fire Warner etc.
- Automatic Control Equipment

#### DIMENSIONS: (Unit: mm)

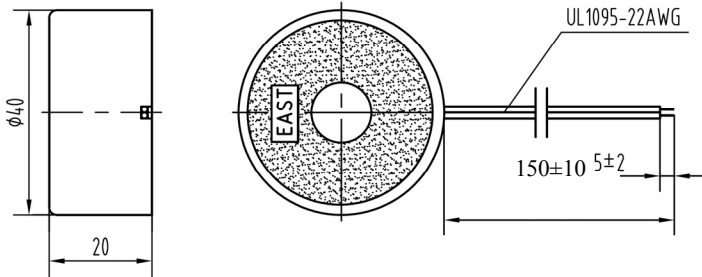

#### CHARACTERISTICS:

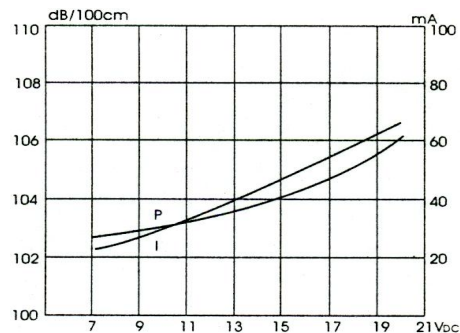

#### ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at

9V <sub>DC</sub> /100cm	100dB(A)
7.5V <sub>DC</sub> /300cm	85dB(A)
Rated Voltage	9(7.5)V <sub>DC</sub>
Operating Voltage	7~20V <sub>DC</sub>
Max. Consumption	50mA/9V <sub>DC</sub>
Oscillating Frequency	3.2±0.5KHZ
Tone Nature	Continuous
Operating Temperature	-20~+60°C
Case Material/Color	ABS/Black
Weight	12.5g

#### PACKING INFORMATION:

Packing: 700 pcs per export carton

Carton Size: 47×20.5×23 cm

G. Weight: 10.3kgs N. Weight:8.8kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768



REVISION HISTORY				
REV	DESCRIPTION	ISSUED BY/DATE	CHECKED	APPROVED
2	RELEASE	WENGUANGJUN May.14,2008	ZHANGCHUNLEI	WANGJIANCHENG
3	Min.SPL change from 90dB(A)/7.5V <sub>DC</sub> /300cm to 85dB(A)/7.5V <sub>DC</sub> /300cm	WENGUANGJUN Dec.4,2009	ZHANGCHUNLEI	WANGJIANCHENG