


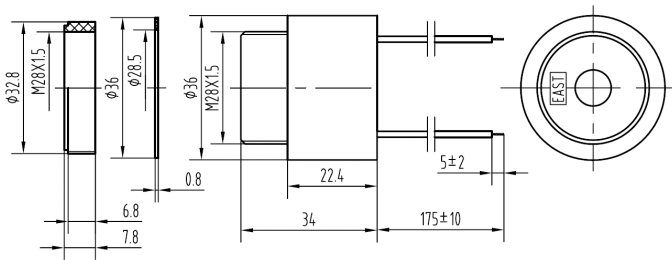

Piezo Buzzer

FM-12K-900L


Rev.2

**DIMENSIONS:(Unit: mm)****FEATURES:**

- High Output
- Sealed Type
- High Reliability

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

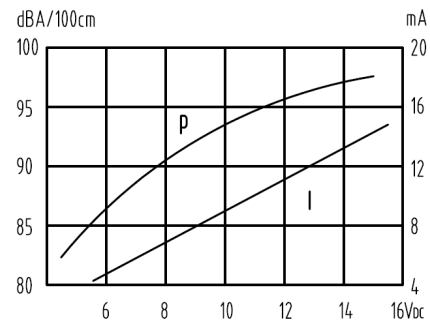CHARACTERISTICS:**ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

12V_{DC}/100cm.....90dBRated Voltage..... 12V_{DC}Operating Voltage.....2~16V_{DC}Max. Consumption.....8~50mA/12V_{DC}

Oscillating Frequency.....3.0±0.5kHz

Tone Nature.....Continuous

Operating Temperature.....-20~+70°C

Case Material/Color.....PC/Black

Weight.....26g

Wire Standard.....UL1095-22AWG

Note: This product is epoxy-potting type.

PACKING INFORMATION:

Packing: 350 pcs per export carton

Carton Size: 47×30.5×23 cm

G. Weight: 10.6 kgs N. Weight: 9.1 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

