



### Piezo Buzzer



Rev.2

## FM-220F-903A




#### FEATURES:

- High Output
- Sealed Type
- High Reliability


#### APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

#### DIMENSIONS:( Unit: mm)

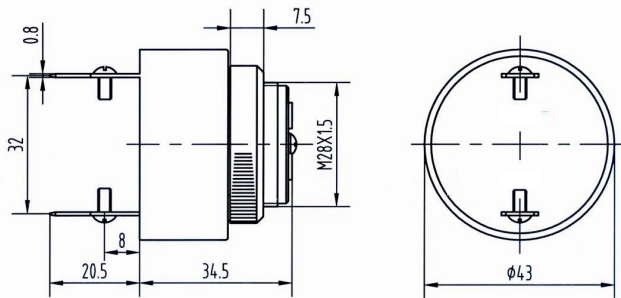

#### CHARACTERISTICS:

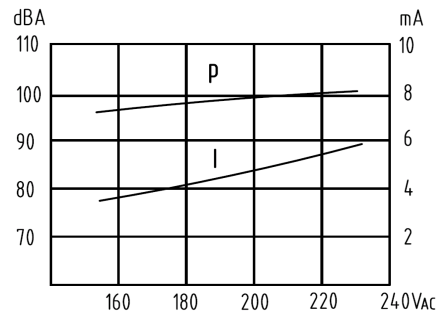

With client's label

#### ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at

220V <sub>AC</sub> /60cm.....	90dB
Rated Voltage.....	220V <sub>AC</sub>
Operating Voltage.....	180~240V <sub>AC</sub>
Max. Consumption.....	20mA/220V <sub>AC</sub>
Oscillating Frequency.....	3.0±0.5kHz
Tone Nature.....	Slow Pulse
Operating Temperature.....	-20~+70°C
Case Material/Color.....	Fire-resistance ABS/Black
Weight.....	35g

Note: 1. Slow Pulse  $f_s=1.0\text{Hz}\pm 20\%$  2. This product is epoxy-potting type.

#### PACKING INFORMATION:

Packing: 200 pcs per export carton  
 Carton Size: 41×26×33 cm  
 G. Weight: 8.5 kgs N. Weight: 7.0kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany  
 Tel: +49-6442-9220950, Fax: +49-3212-1258768

