

**Piezo Buzzer**RoHS
Compliant

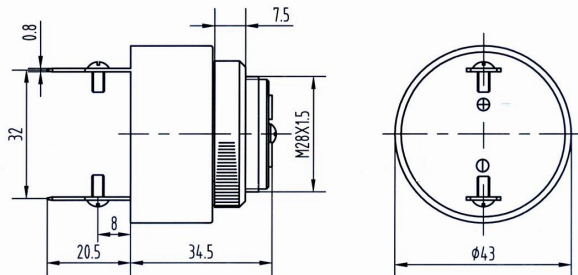

Rev.2

FM-24F-903A**FEATURES:**

- High Output
- Sealed Type
- High Reliability

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS:(Unit: mm)**CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS :**

Min. Sound Pressure Level at

24V _{DC} /60cm.....	90dB
Rated Voltage.....	24V _{DC}
Operating Voltage.....	12~28V _{DC}
Max. Consumption.....	20mA/24V _{DC}
Oscillating Frequency.....	3.0±0.5kHz
Tone Nature.....	Slow Pulse
Operating Temperature.....	-20~+70°C
Case Material/Color.....	ABS/Black
Weight.....	35g

Note: 1. Slow Pulse fs=1.0Hz 2. This product are epoxy-potting type.

PACKING INFORMATION:

Packing: 200 pcs per export carton

Carton Size: 41×26×33 cm

G. Weight: 8.5 kgs N. Weight: 7.0kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-12587

