



# Product Specification

Product Name:	Piezo Buzzer
Part Number:	SL11-12P
Version:	1.01
Date:	2015-2-5
Note:	


**Company passed ISO 9001 / ISO TS16949 / ISO 14001 Certifications**

## Revision History

Rev.	Description	Author/Date	Checked By	Approver
1.01	Quality Certificate Symbol revised	刘宁 2015-2-5	汤礼东	王建成
1.0	Released	陈启旺 2012-4-6	汤礼东	王建成

## 1. Part Number SL11-12P

## 2. Dimension Drawing (Unit: mm)

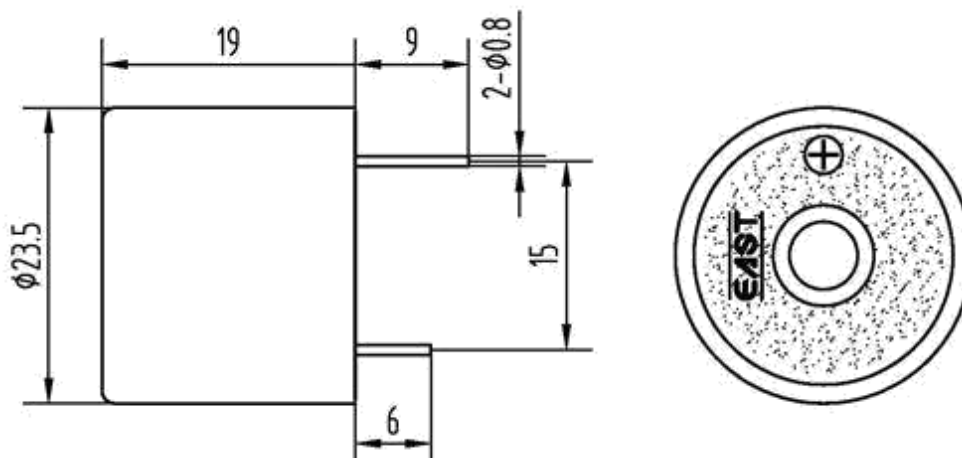


## 3. Specification

No.	Item	Specification
3-1	Min. Sound Pressure Level	88dB/12V <sub>DC</sub> /30cm
3-2	Rated Voltage	12V <sub>DC</sub>
3-3	Operating Voltage	9~15V <sub>DC</sub>
3-4	Max. Consumption	15mA/12V <sub>DC</sub>
3-5	Oscillating Frequency	3.3± 0.5 kHz
3-6	Tone Nature	Continuous
3-7	Operating Temperature	-20~+70°C
3-8	Case Material/Color	ABS/Black
3-9	Weight	7g
3-10	Pin Strength	More than 10N

### NOTES:

Test should be made under the conditions of room temperature (20± 10°C), normal humidity (60± 20%) and normal atmospheric pressure. In this case, however, that the judgment is questionable, the test conditions are to be changed to room temperature 20± 2°C, relative humidity 60~70% and normal atmospheric pressure

#### 4. Typical Frequency Response Curve

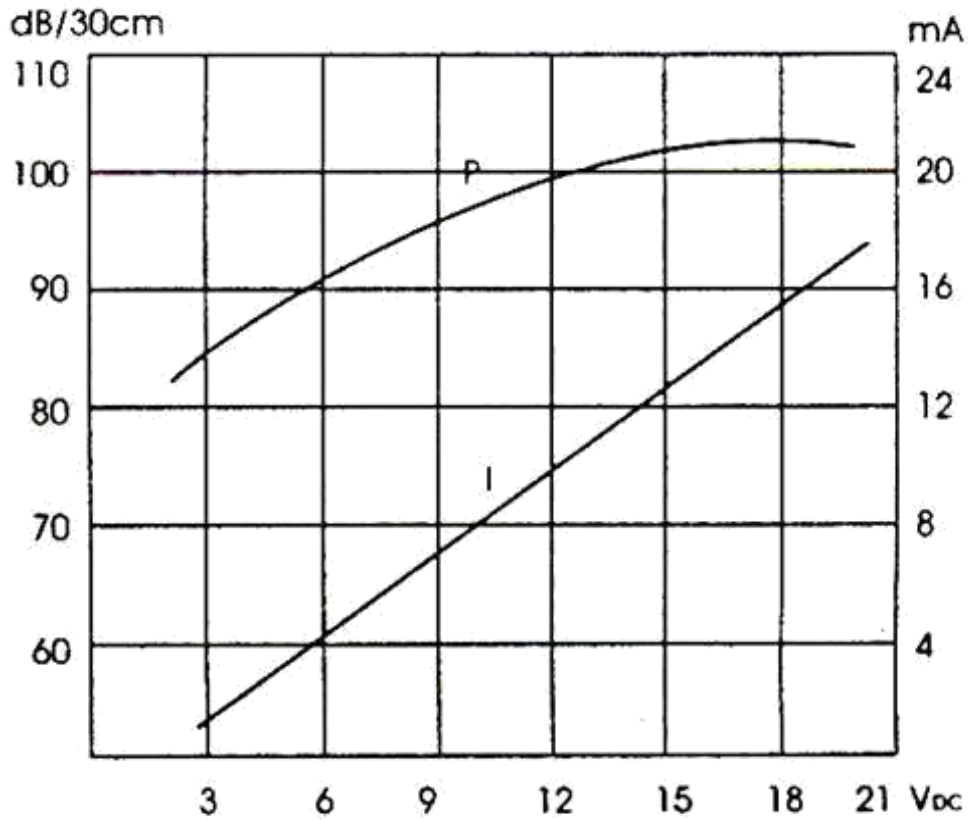


**Note:**Distance 30 cm

#### 5. Reliability Test


No.	Item	Method of Test	Tolerance after Testing
5-1	Operating Temperature	-20~+70°C	Sound pressure level initial value ± 10dB
5-2	Storage in high temperature	Storage in +70°C test box 96 hours then exposed to the room temperature for 2 hours	
5-3	Storage in low temperature	Storage in -20°C test box 96 hours then exposed to the room temperature for 2 hours	Max. consumption value ± 20%
5-4	Life test in the room temperature	Operate the product continuously 5 seconds on 5 seconds off 300 hours at rated voltage	Oscillating frequency value ± 20%
5-5	Temperature / humidity cycle test	Storage in +40°C, 93± 3%RH test box 96 hours then exposed to the room temperature for 2 hours	
5-6	Temperature (high and low) cycle test	Conduct the test for 5 cycles without applying power then expose to the room temperature for 2 hours.(See Figure 5-6)	

5-7	Vibration test	Conduct the test for the directions of X Y and Z for 0.5 hour each (total 1.5 hours). To-and Fro sweep time(from 10 to 55Hz and then 55 to 10) under single amplitude of 0.75mm is 3 minute, then expose to the room temperature for 2 hours	
5-8	Drop test	Drop a product naturally from the height of 700mm onto the surface of 100mm thick wooden board. Two directions: upper and side of the product are to be applied for this drop test once respectively	
5-9	Soldering heat resistance test	Dip the connecting pins in soldering at $260 \pm 5^{\circ}\text{C}$ for $10 \pm 1$ seconds	
5-10	Test of soldering	Dip the connecting pins in soldering at $230 \pm 5^{\circ}\text{C}$ for $3 \pm 0.5$ seconds	Solder shall be attached around over 95% of the dipped portion
<b>NOTE:</b> The pins are allowed to deform after drop test.			

Figure 5-6

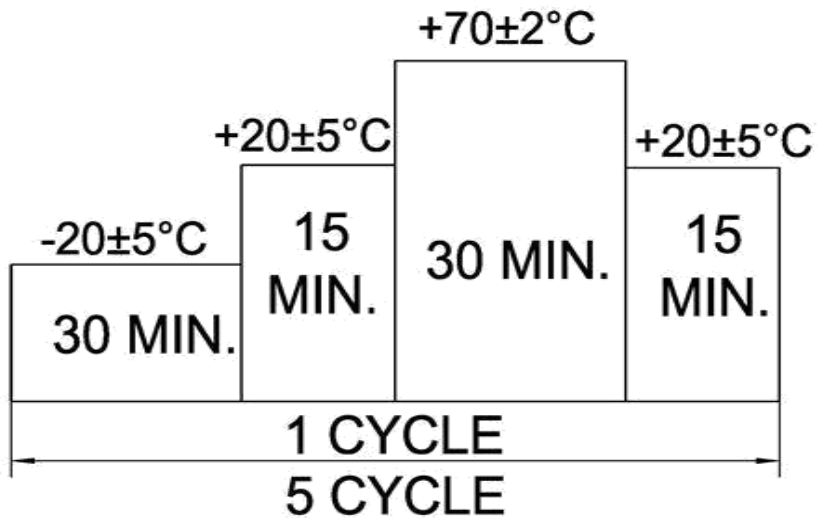

## 6. Electrical Testing Method

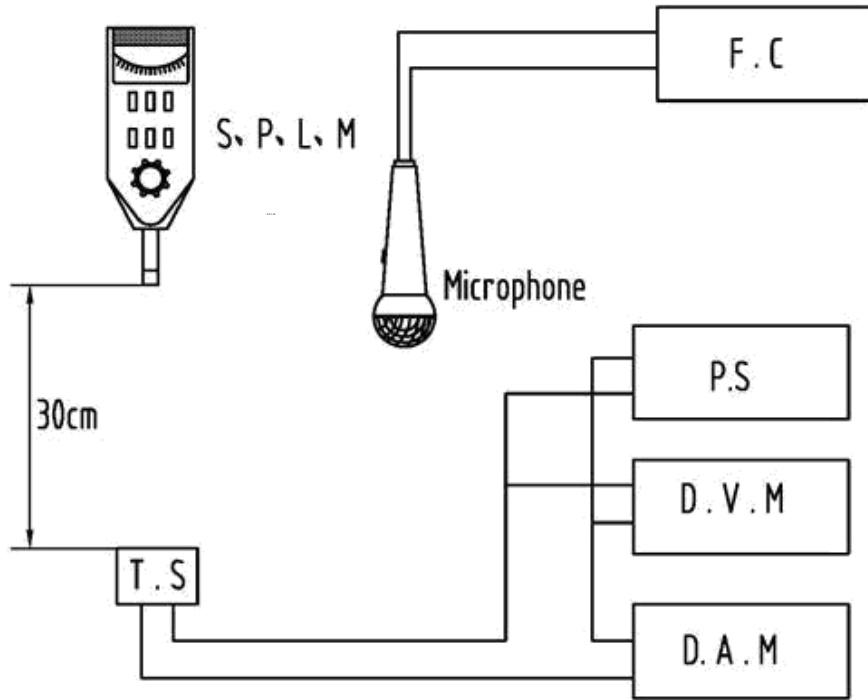

T.S	Testing Sample
F.C	Frequency Counter
P.S	Power Supply
D.V.M	DC Voltage Meter
D.A.M	DC Ampere Meter

## 7. Packing Information

**Packing: 1600 pcs per export carton**  
**Carton Size: 47× 30.5× 33 cm**  
**G. Weight: 13 kgs N. Weight: 11.2 kgs**

*Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany*  
*Tel: +49-6442-9220950, Fax: +49-3212-1258768*